


INSULATED CORD END TERMINAL DIN NORM

FRENCH NORM	CODE	CABLE CROSS SECTION (mm ²)	F	L	C	W	PCS/BOX
ST	8005	0,34	8,0	12,0	0,80	1,9	1.000
ST	8007	0,50	8,0	14,0	1,00	2,6	1.000
ST	8010	0,75	8,0	14,0	1,20	2,8	1.000
ST	8014	1,00	8,0	14,0	1,40	3,0	1.000
ST	8017	1,50	8,0	14,0	1,70	3,5	500
ST	8021	2,50	8,0	14,0	2,20	4,2	500
ST	8025	4,00	10,0	17,0	2,80	4,8	200
ST	8028	6,00	12,0	20,0	3,50	6,3	200
ST	8030	10	12,0	22,0	4,50	7,6	100
ST	8032	16	12,0	24,0	5,80	8,8	100
ST	8034	25	16,0	30,0	7,30	11,2	50
ST	8036	35	16,0	30,0	8,30	12,7	50
ST	8039	50	20,0	36,0	10,30	15,0	25
ST	8041	70	21,0	37,0	13,50	16,0	10
ST	8042	95	25,0	44,0	14,70	18,0	10
ST	8043	120	27,0	48,0	16,70	20,0	10
ST	8044	150	32,0	58,0	19,50	23,0	10



INSULATED TWIN CORD AND TERMINAL DIN NORM 46228

FRENCH NORM	CODE	CABLE CROSS SECTION (mm ²)	F	L	C	W	PCS/BOX
ST	8161	2 x 0,50	8,0	15,0	1,5	2,5 / 4,7	500
ST	8162	2 x 0,75	0,8	15,0	1,8	2,8 / 5,0	500
ST	8164	2 x 1,0	8,0	15,0	2,05	3,4 / 5,4	500
ST	8166	2 x 1,0	10,0	17,0	2,05	3,4 / 5,4	500
ST	8168	2 x 2,5	10,0	18,5	2,8	4,2 / 7,8	250
ST	8170	2 x 4,0	12,0	23,0	3,7	4,9 / 8,8	100
ST	8171	2 x 6,0	14,0	26,0	4,8	6,9 / 10,0	100
ST	8172	2 x 10,0	14,0	26,5	6,4	7,6 / 12,8	50
ST	8173	2 x 16,0	14,0	31,5	8,3	9,6 / 18,6	50

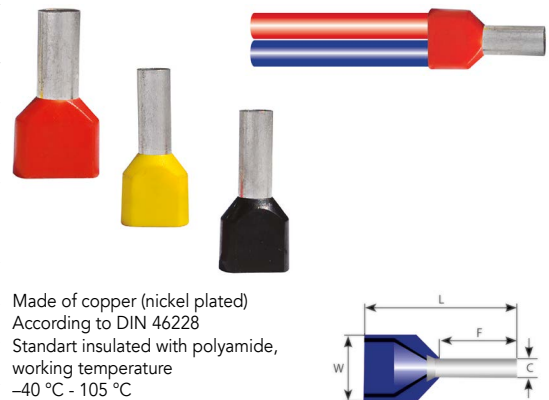

NON - INSULATED CORD AND TERMINALS DIN 46228

CODE	CABLE CROSS SECTION (mm ²)	L	C	W	PCS/BOX
8100	0.50	6.0	1.0	2.1	1.000
8101	0.50	8.0	1.0	2.1	1.000
8102	0.50	10.0	1.0	2.1	1.000
8103	0.75	6.0	1.2	2.3	1.000
8104	0.75	8.0	1.2	2.3	1.000
8105	0.75	10.0	1.2	2.3	1.000
8107	1.0	8.0	1.4	2.5	1.000
8108	1.0	10.0	1.4	2.5	1.000
8109	1.0	12.0	1.4	2.5	1.000
8111	1.5	8.0	1.7	2.8	1.000
8112	1.5	10.0	1.7	2.8	1.000
8113	1.5	12.0	1.7	2.8	1.000
8115	2.5	8.0	2.2	3.4	1.000
8116	2.5	10.0	2.2	3.4	1.000
8117	2.5	12.0	2.2	3.4	1.000
8118	4.0	8.0	2.8	4.0	1000
8120	4.0	10.0	2.8	4.0	1000
8121	4.0	12.0	2.8	4.0	1000
8122	4.0	15.0	2.8	4.0	1000
8123	4.0	18.0	2.8	4.0	1000
8124	6.0	10.0	3.5	4.7	500
8125	6.0	12.0	3.5	4.7	500
8126	6.0	15.0	3.5	4.7	500



CODE	CABLE CROSS SECTION (mm ²)	L	C	W	PCS/BOX
8127	6.0	18.0	3.5	4.7	500
8128	10.0	12.0	4.5	5.8	200
8129	10.0	15.0	4.5	5.8	200
8130	10.0	18.0	4.5	5.8	200
8131	16.0	12.0	5.8	7.5	100
8132	16.0	15.0	5.8	7.5	100
8133	16.0	18.0	5.8	7.5	100
8134	25.0	15.0	7.3	9.5	100
8135	25.0	16.0	7.3	9.5	100
8136	25.0	18.0	7.3	9.5	100
8137	25.0	22.0	7.3	9.5	100
8138	35.0	16.0	8.3	11.0	75
8139	35.0	18.0	8.3	11.0	75
8140	35.0	20.0	8.3	11.0	75
8141	35.0	25.0	8.3	11.0	75
8142	50.0	18.0	10.3	13.0	25
8143	50.0	20.0	10.3	13.0	25
8144	50.0	25.0	10.3	13.0	25
8146	70.0	25.0	13.5	15.3	10
8148	95.0	25.0	14.7	16.6	10
8151	120.0	32.0	16.7	18.0	10
8153	150.0	32.0	19.5	21.5	10